

SINK PLUMBING FOR 60CM SHELF CABINET, AU



WHAT IS THE PROCESS?



Your plumber:
Runs feed and waste pipes
to the correct location




Grillo install team:
Install your outdoor
kitchen units



Your plumber:
Makes the final
connections


WHAT DO GRILLO SUPPLY?

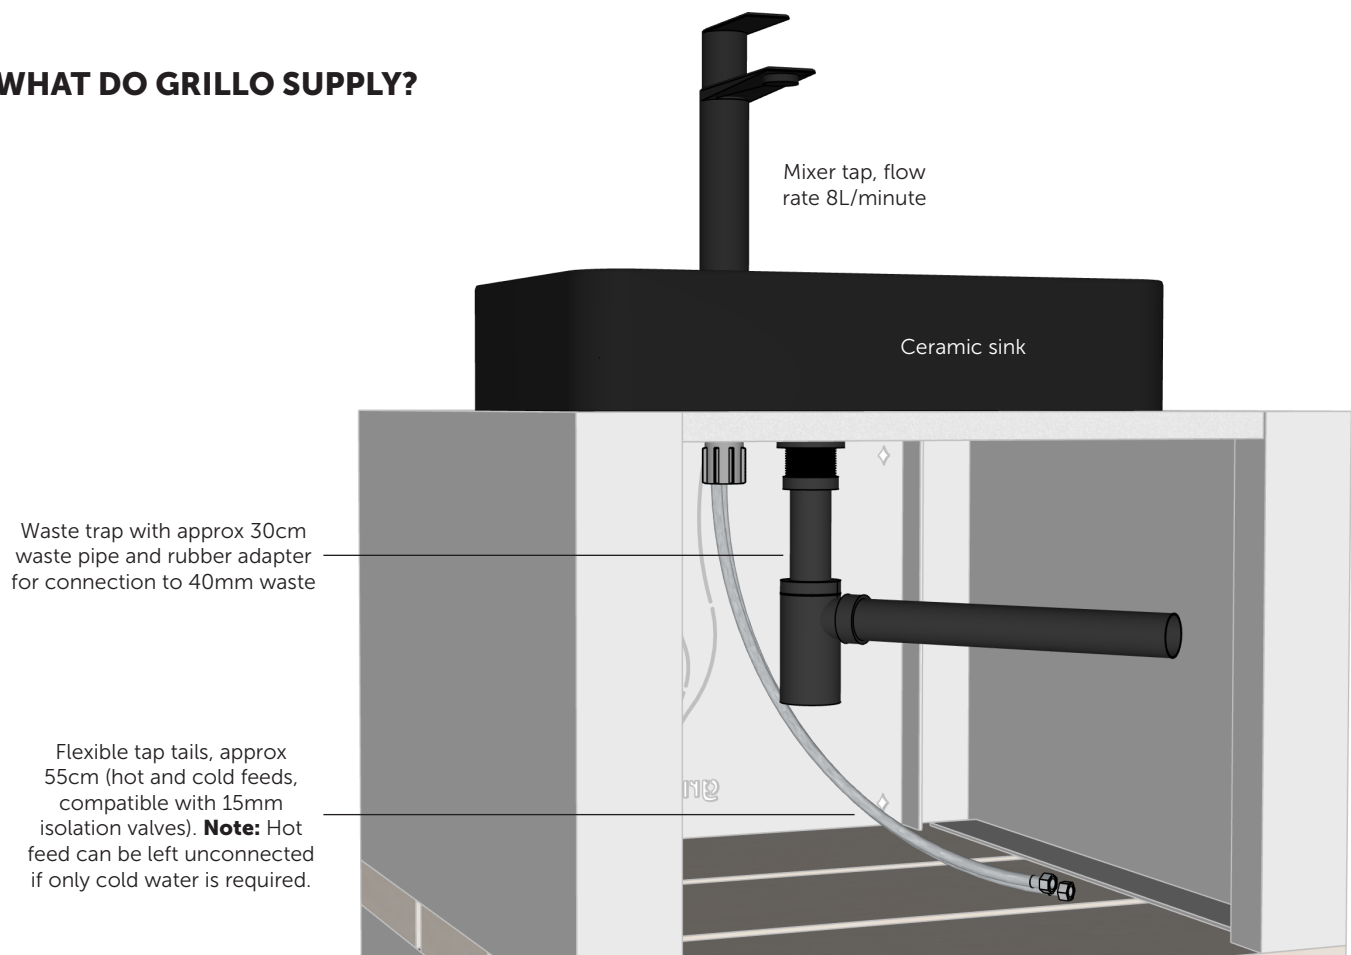

PIPEWORK POSITIONING

Example install diagram:

Large units are 1200 x 610mm.
Small units are 610 x 610mm.

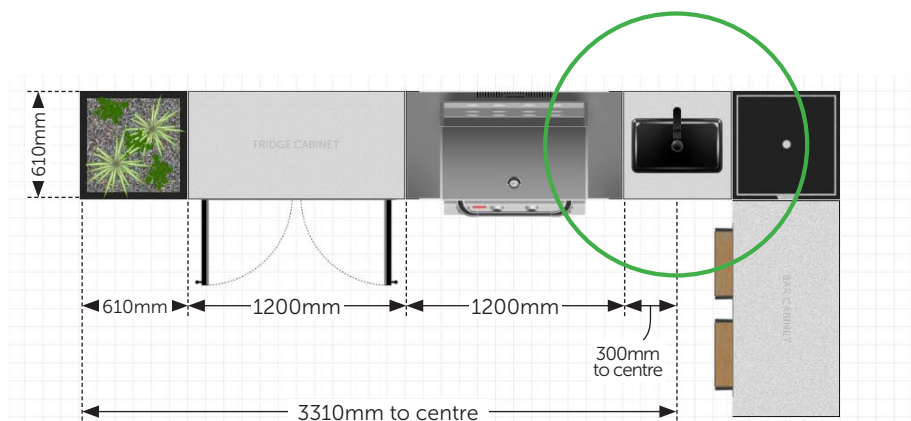


PIPEWORK ROUTING OPTIONS

There are a number of routing options. Note that most configurations require permanent modifications to the sink unit, so you must agree a route with your plumber before he starts work.




Option A

Run the pipework through the rear fascia by removing the upper fascia cutout*.

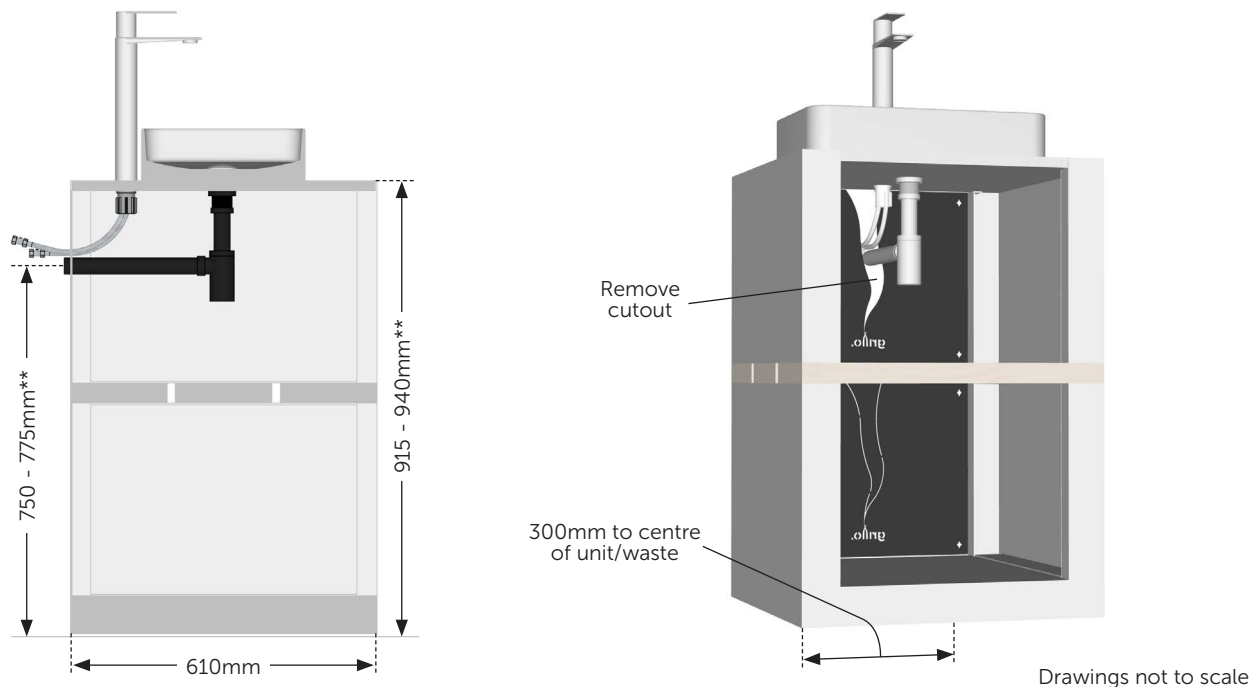

Option B

Run the pipework (we recommend using flexible waste pipe) through the base by drilling through the iroko shelf and removing the base cutout*.

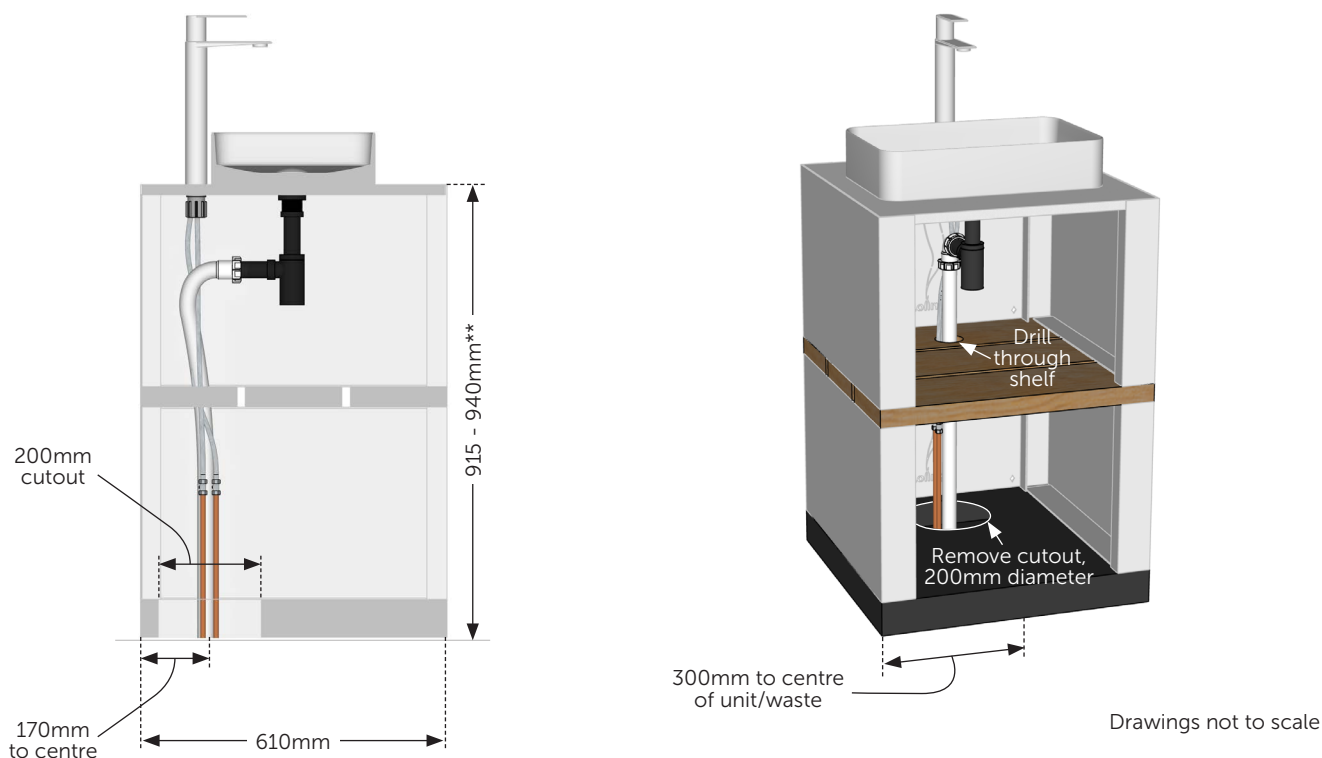


*Please ensure you paint over any exposed metal with the touch-up paint.

**The height variation is for the adjustment provided in the cabinet feet.


Option C

Run the pipework (we recommend using flexible waste pipe) through the rear fascia by drilling through the iroko shelf and removing the lower fascia cutout*.

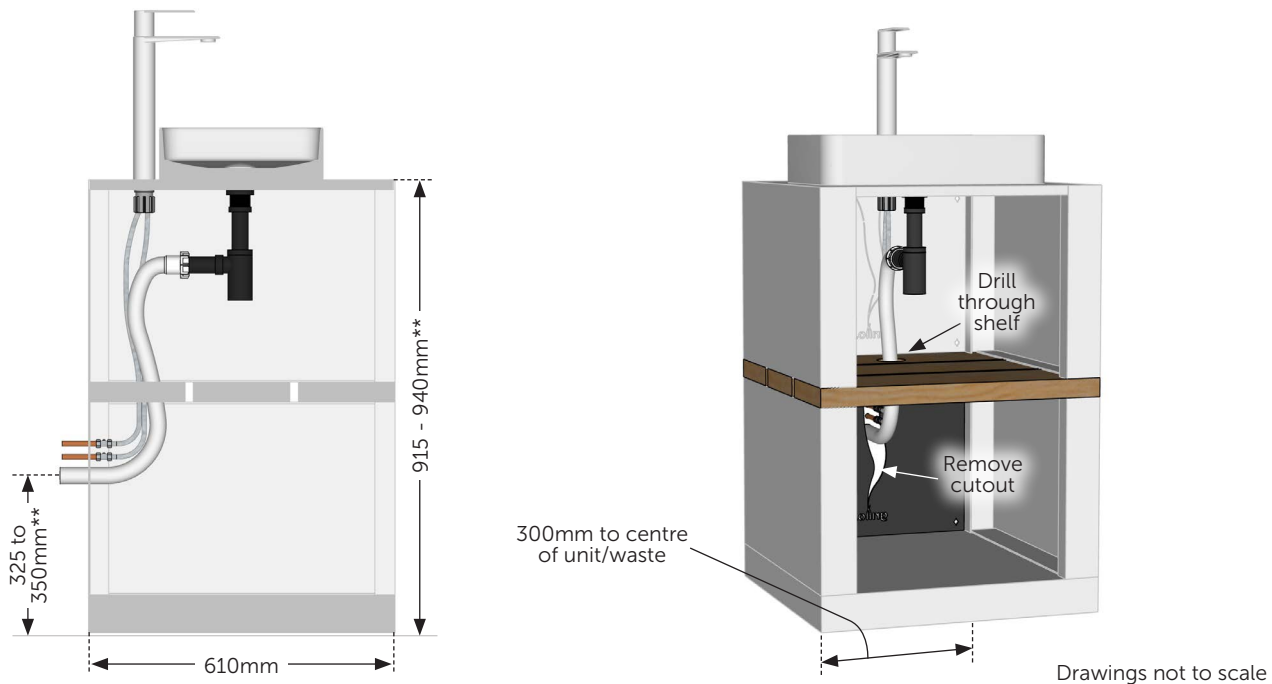

Option D

Run the pipework (we recommend using flexible waste pipe) through the back of the unit by drilling through the iroko shelf and removing the lower rear fascia. We recommend this is only done where the rear of the kitchen will not be seen and the front will be covered by doors or crates.

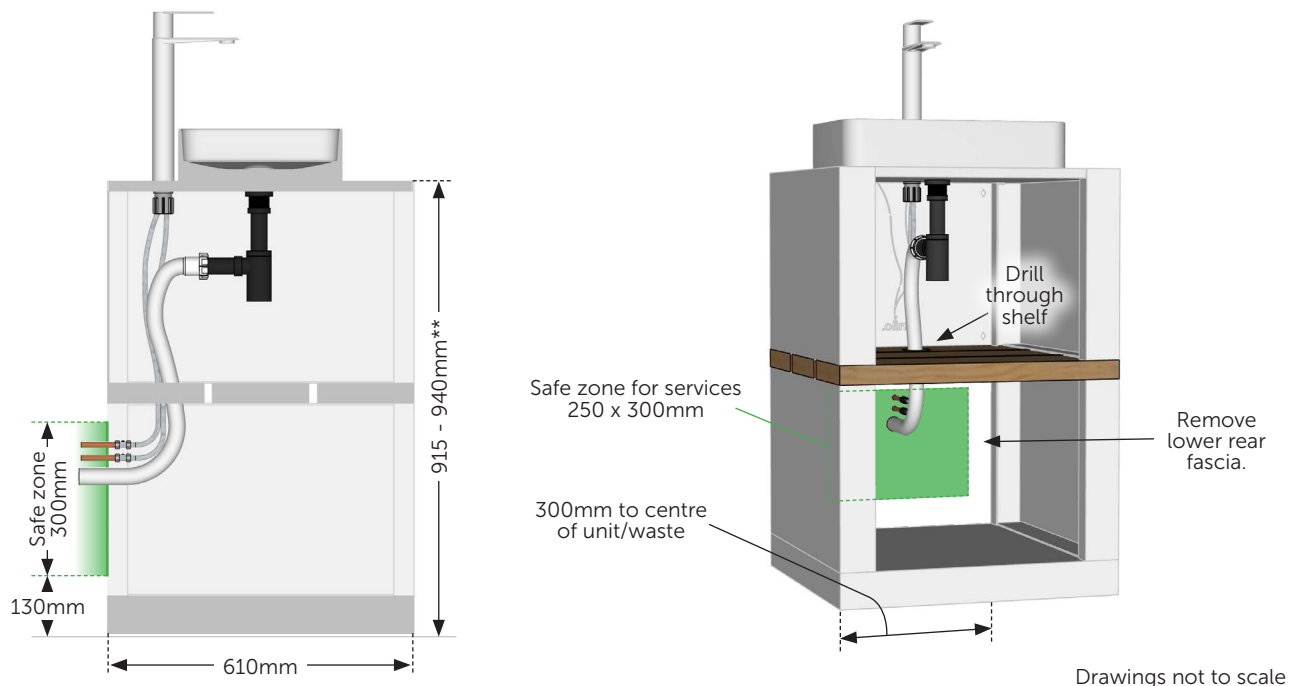

*Please ensure you paint over any exposed metal with the touch-up paint provided.

**The height variation is for adjustment in the cabinet feet.