



WHAT IS THE PROCESS?



Your gas fitter:
Runs the mains gas
pipework near the unit



Grillo install team:
Install your outdoor
kitchen units



Your gas fitter:
Makes the final
connection between
mains gas pipe & BBQ

WHAT DO GRILLO SUPPLY?



Note: The gas hose **will not** be connected to the BBQ by the installers as this needs to be completed by a **licensed gas fitter**. The 3m gas hose will be supplied by us for the gas fitter to connect.


3m stainless-steel-braided gas
hose, 3/8" SAE FF x male bayonet.
Gas hose will **not** be connected to
BBQ by the kitchen fitters.

approx. 2.5m radius reach of hose

MAINS GAS POSITIONING

Example install diagram:

Large units are 1200 x 610mm.
Small units are 610 x 610mm.


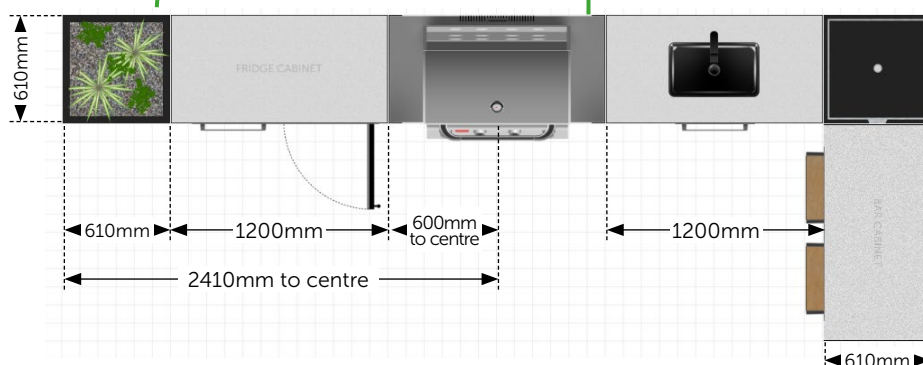


PIPEWORK ROUTING OPTIONS




Option 1

Run the mains gas hose through the ground to the centre of the gas BBQ unit.

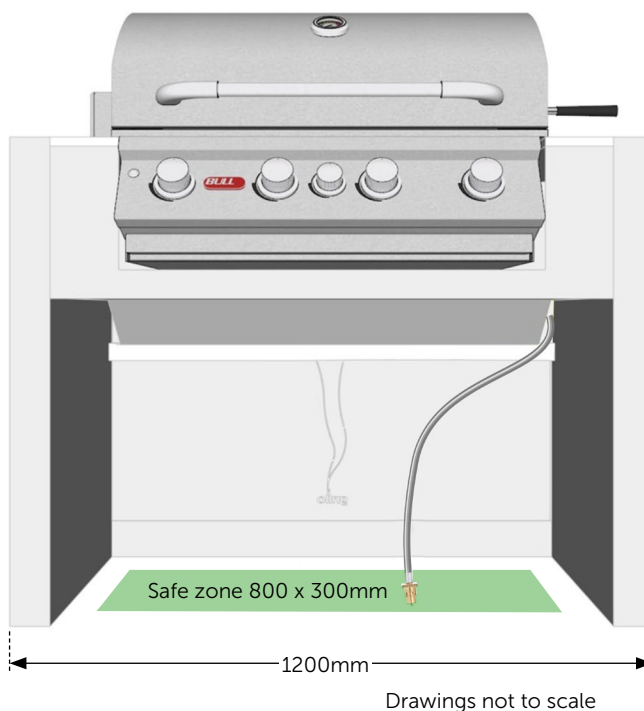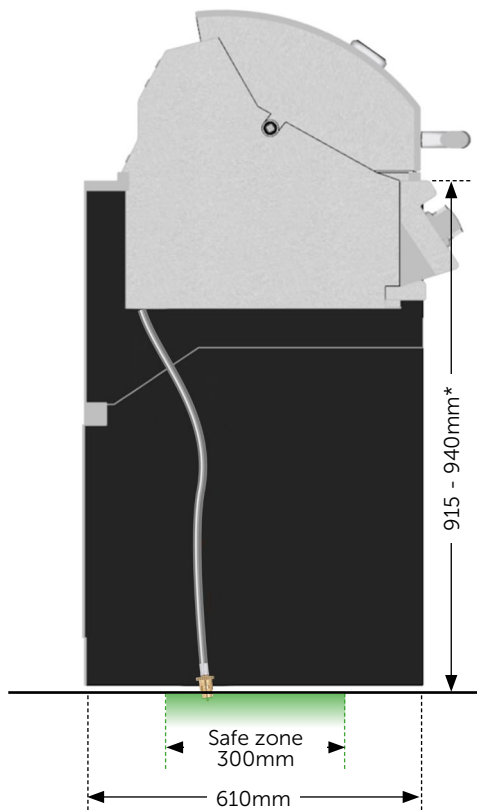

Option 2

Run the hose through the back of the unit by removing the cut-out in the lower rear fascia, as shown.

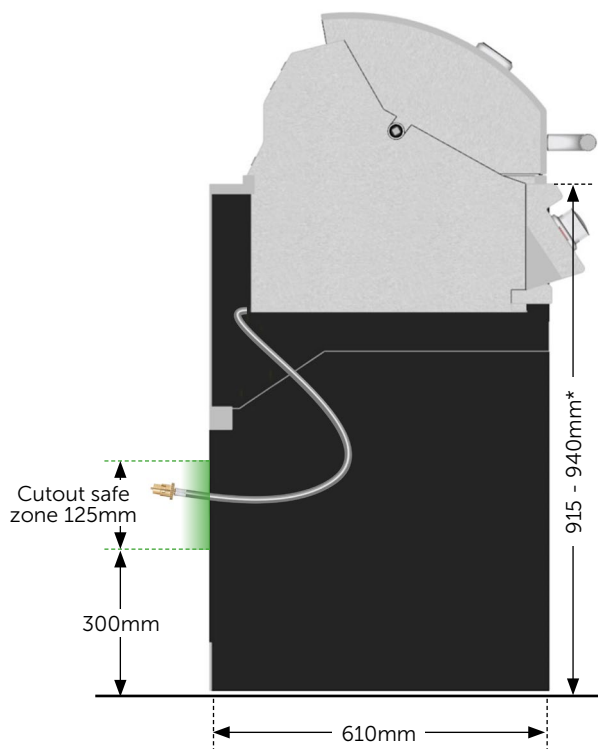


*The height variation is for adjustment in the cabinet feet.

Option 3

Run the hose through the back of the unit by completely removing the rear fascia.



Instructions for Natural Gas (mains gas) ONLY

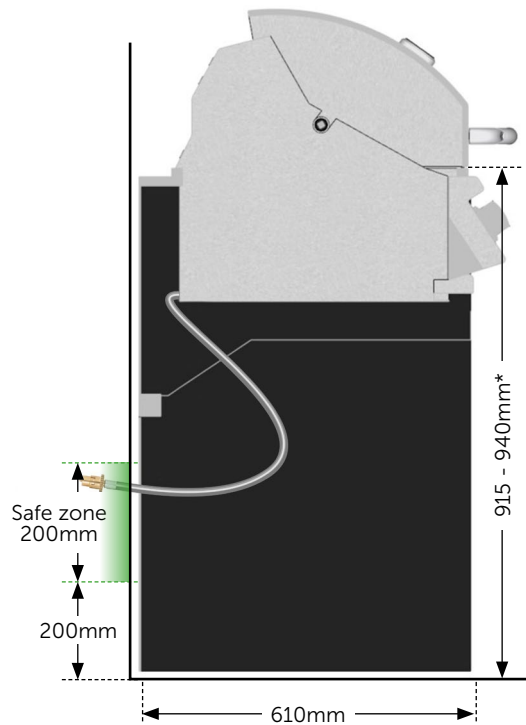

Drawings not to scale

*The height variation is for adjustment in the cabinet feet.

BULL BBQ GAS CONNECTION, **TO BE COMPLETED BY LICENSED GAS FITTER ONLY**

Start by removing the BBQ from the unit and rolling it onto its back so you have access to the underside.



1. Supplied 3m stainless-steel-braided gas hose, 3/8" SAE FF x male bayonet




2. Supplied elbow connector



3. Connection point beneath the BBQ. **Remove** the installed adapter, circled.



4. The regulator can be dismounted if required during fitting. Ensure it is securely remounted after.

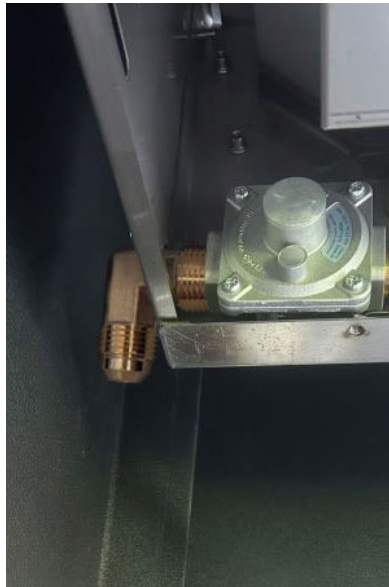

5. Install the elbow connector, and connect the supplied gas hose



Warning: Do not attempt to connect the hose without using the supplied elbow connector. The hose will kink.