


SERVICES FOR GRILLO DOUBLE FRIDGE



Appliance supplied with UK, US or AU plugs, according to country of order.


WHAT IS THE PROCESS?



Your electrician:
Runs cables to location and
installs external socket



Grillo install team:
Install your outdoor
kitchen units



Your electrician:
Installs kitchen-
mounted socket if reqd.


WHAT DO GRILLO SUPPLY?



ELECTRICS POSITIONING

Example install diagram:

Large units are 1200 x 610mm.
Small units are 610 x 610mm.

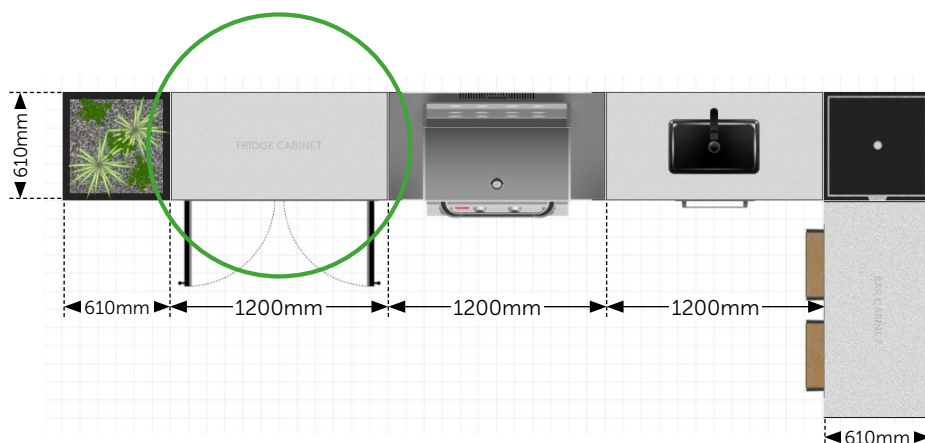


OUTDOOR RATED SOCKET - LOCATION OPTIONS



Appliance supplied with UK, US or AU plugs, according to country of order.


Option 1

Run the cable through the rear fascia by removing the cut-out, then screw the socket to the right or left hand side of the timber beam inside the cabinet.

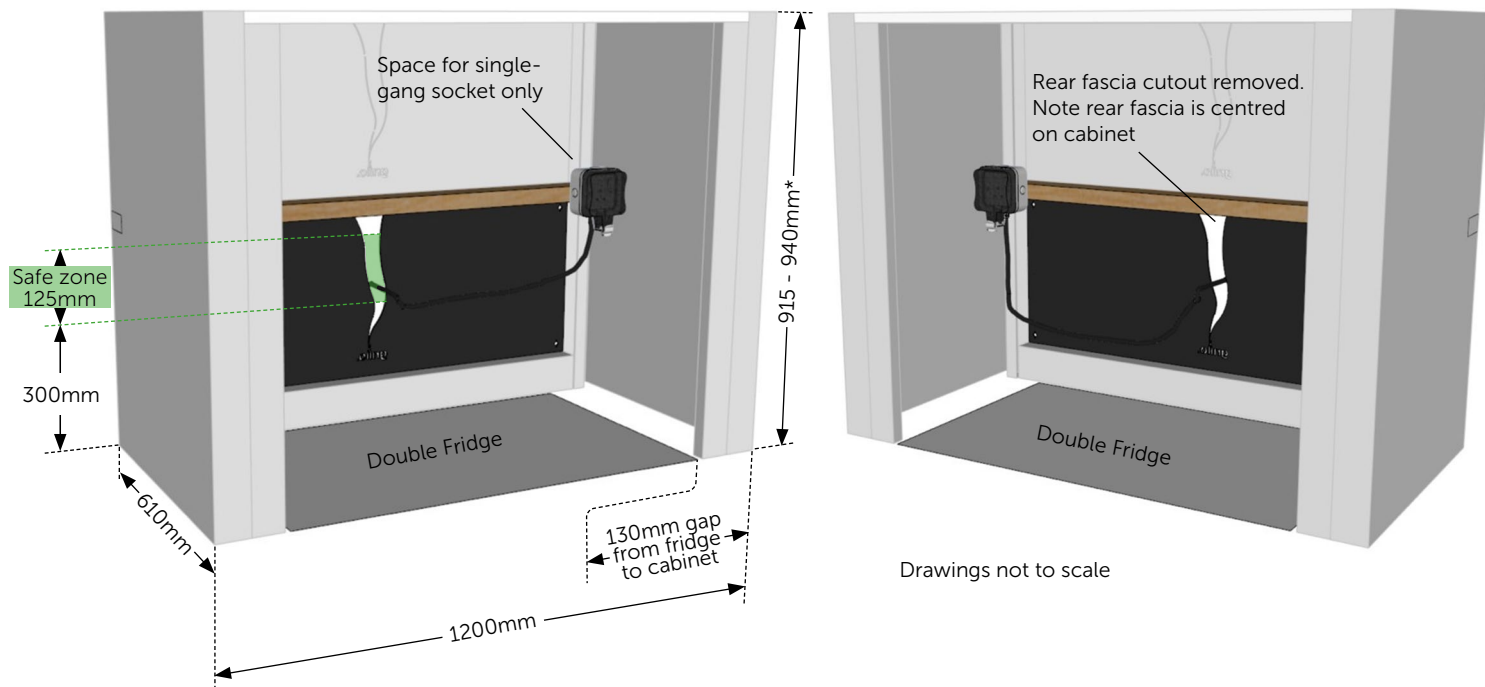

Option 2

If the cabinet is going against a wall, the entire lower rear fascia can be removed, and the outdoor socket attached to the wall behind the cabinet. We only recommend this if none of the rear of the cabinet is going to be seen.

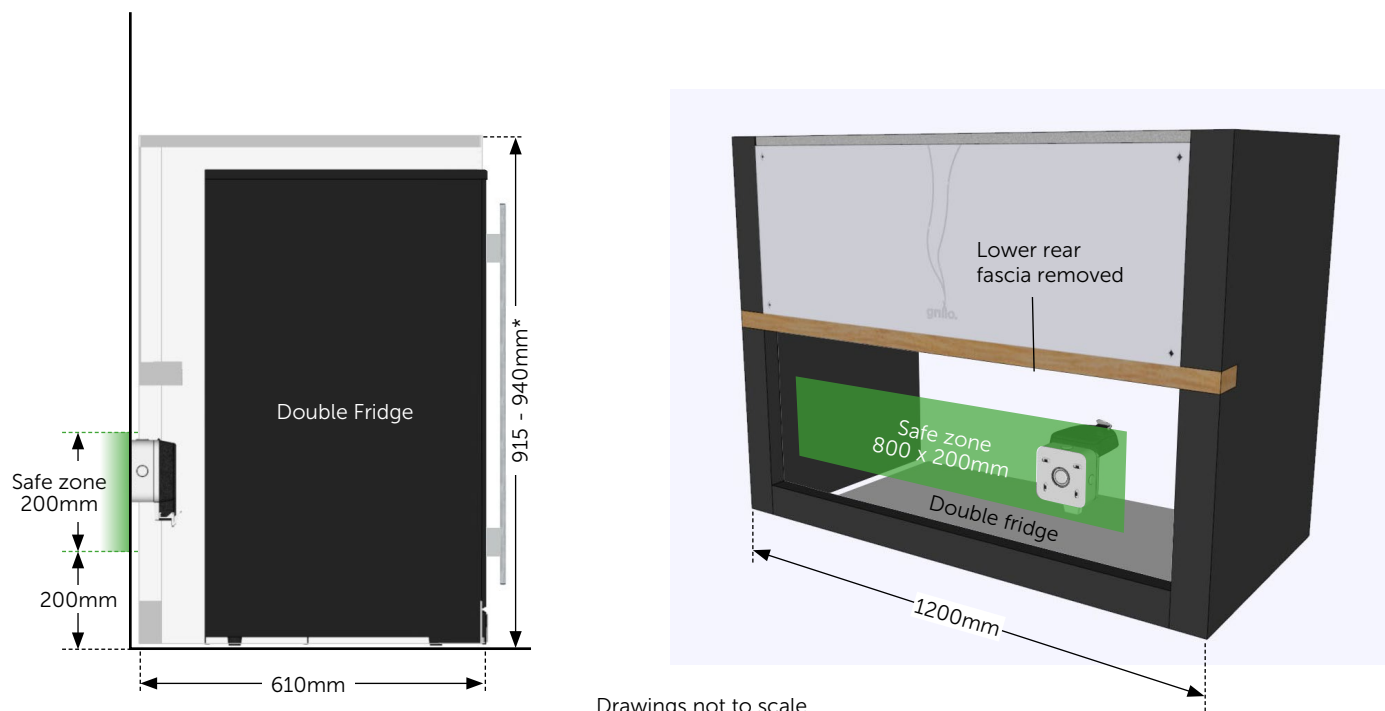

*The height variation is for adjustment in the cabinet feet.

Option 3

Locate the socket anywhere within 3m of the rear of the fridge.



Appliance supplied with UK, US or AU plugs, according to country of order.

